


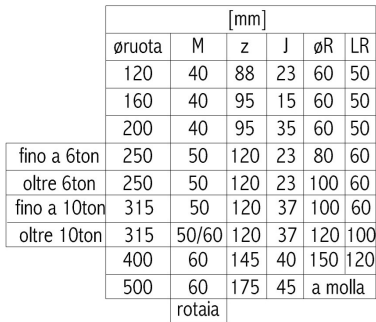

Portata	Paranco	L	Rmax	Peso gru	rotaia Ø ruota	M	it	S	A	min b	Min e	F	i	Ø Ruota	SC	a1 a2	g	Potenza Motori M1	Potenza Motori M2	Potenza Motori M3
[Kg]	tipo	[m]	[Kg]	[Kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[KW]	[KW]	[KW]
																		Scorrimento Vel. 10/40 m/min	Traslazione Vel. 5/20 m/min	Sollevamento Vel. 4/1,3 m/min
				TESTATA								TRAVE			CARRELLO					
6.300	XM316 NS4 H10A/5 2m/M5	5	3.238	2.150	200	40	1.600	1.940	230	140	315	770	147	160	1.000	900 900	230	C 2 x 0,75	1 x 0,37	1 x 5/1,7
		6	3.360	2.395																
		7	3.484	2.635																
		8	3.606	2.835																
		9	3.728	3.165																
		10	3.851	3.495																
		11	3.973	3.825																
		12	4.055	4.061																
		13	4.137	4.296																
		14	4.219	4.532																
		15	4.344	4.974																
		16	4.469	5.416																
		17	4.595	5.857																
		18	4.733	6.369																
		19	4.871	6.881																
		20	5.009	7.393																
21	5.183	8.057																		
22	5.357	8.721																		
23	5.530	9.385																		
24	5.751	10.243																		
25	5.971	11.101																		
26	6.192	11.958																		